



**Detecting natural gas,
propane, butane, LPG and
LNG has never been so e^z**

Flammable Gas Detector



e^zsense is the most convenient way to detect natural gas, propane, butane, LPG and LNG. It is compact and light on the pocket in more ways than one.

e^zsense utilises a catalytic bead sensor which requires absolutely no calibration to individual gases or fuel types - simply point and click!

It is suitable for identifying the source of leaks in pipes, fittings, valves, gas storage tank/cylinders and hot water heaters.

This product is also an opportunity to quickly inform your customers as to the source and size of a leak and undoubtedly provide some peace of mind at the same time.

E^z to use

Simply check the suspected area by pointing e^zsense close to the source. If gas is present the alarm will sound and the yellow LED or the red LED will light up according to the concentration of gas. It couldn't be simpler.

E^z to test

e^zsense can be tested quickly and easily by releasing a small amount of gas (butane) in a well ventilated area. The alarm should sound and the yellow or red LED light will come on.

E^z to look after


e^zsense doesn't react well to water - it will damage the instrument. So please keep it in a dry environment.

Also avoid using it in areas of high humidity.

If, for any reason, e^zsense is redundant for several weeks, it is advisable to remove the batteries to prevent any corrosive damage.



General specification

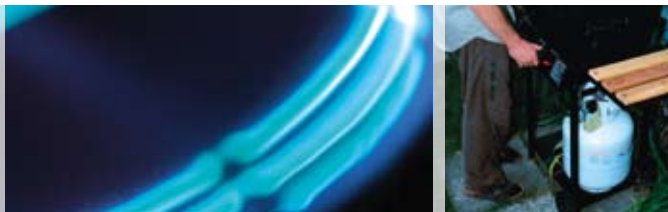

Specification		
Function	Detecting flammable gas leakage	
Range	0 ~ 10,000ppm (20%LEL)*	
Display	Green LED:	Power On - gas less than 500ppm*
	Yellow LED:	Low Alarm - over 500ppm*
	Red LED:	High Alarm - over 2,000ppm*
Approval Codes	CE marked, EMC Directive 89/336/EEC	
Power Consumption	DC 600mW	
Detectable Gas	Natural Gas, Butane, Propane, LPG and LNG	
Humidity	Max 95%RH	
Weight	110g	
Battery Size	1.5V x 2 (AA Alkaline)	
Temperature	-10° ~ +50°C	
Calibration	Not required	
Dimension	188mm, Ø30mm	

